



TFP
PRODECK
ACCESSORIES

SELL SHEET

TFP PRODECK SE SELF LEVELING SCREW
JACK PEDESTALS

TFP PRODECK SE Self Leveling Screw Jack Pedestals



INFORMATION

Height Range: 1.125" – 21.75"

Base Diameter: 8"

Head Diameter: 6"

Tab Height: 1/2"

Tab Width: 5/32"

Load Capacity: 3,300 lbs

Packaging: 12/Carton

FEATURES

- Bi-material head offers anti-noise & anti-slip
- Adjustable heights
- Made from 100% recycled material
- Removable spacer tabs
- Smooth base with pre-cut lines
- Resistant to weathering, acids, UV rays and wear and tear
- Resistant to temperatures ranging from -40F - 248F

OPTIONS

- Wood joist head for joist applications
- Pins for deck tiles
- Shims to level final grade

COMPONENTS TABLE - SE 6-SE 14

SE6 = SE3 + 1xP1	SE9 = SE3 + 2xP1	SE12 = SE3 + 3xP1
SE7 = SE4 + 1xP1	SE10 = SE4 + 2xP1	SE13 = SE4 + 3xP1
SE8 = SE5 + 1xP1	SE11 = SE5 + 2xP1	SE14 = SE5 + 3xP1

TROPICAL

6200 Tomken Rd Mississauga, ON - L5T 1X7 - Canada
1-855-344-4500 | www.TropicalForestProducts.com | info@tropicalforestproducts.com
© All Rights Reserved - Tropical Forest Products 2023



LEGAL LUMBER™






TFP
PRODECK
ACCESSORIES

SELL SHEET

TFP PRODECK SE SELF LEVELING SCREW
JACK PEDESTALS

TFP PRODECK SEPH Self Leveling Screw Jack Pedestal Head with pressure fit pins for use with TFP Deck Tiles

Anti-noise bi-component soft rubber pad and pressure fit pin connection technology are integrated into our unique self-leveling head design. When installed a mechanical connection between the tiles and the head seamlessly integrate all components of the system.

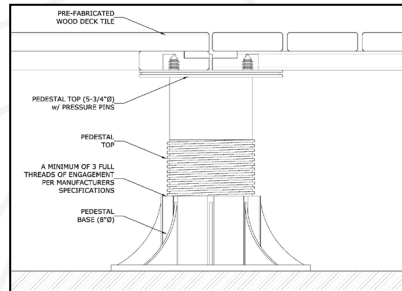

Deck Tile / Pedestal Connection Detail

TFP PRODECK SE Self Leveling Pedestal Special Features

Our Adjustment Key allows for final micro adjustments after installation. Our Screw Block System indicates when units have safely reached their maximum height adjustment. Bases are pre-cut to facilitate perimeter and corner placement.



Adjustment Key



Max Height Locking Mechanism



Pedestal Base Scoring



Joist Head

Slope Chart

1% grade = 1/8th inch per foot
2% grade = 1/4th inch per foot
3% grade = 3/8th inch per foot
4% grade = 1/2 inch per foot
5% grade = .625 inches per foot
Use for slope above 5% is not recommended

TFP PRODECK WJSE Self Leveling Screw Jack Pedestal with Wood Joist head for conventional decking application.

TFP PRODECK Pedestal Systems support conventional deck construction as well as deck tiles. Our unique WJSE pedestal is designed to allow for the attachment of stringers. A simple application of 2x4 Pressure Treated or 5/4x4 Ipe Stringers (laid flat) with one of Tropical Forest Products 5/4x4 decking options, provides not only a traditional deck appearance, it also generates a live load rating to 200 psf. As a 'Best Practice' Tropical Forest Products recommends the use of 5/4x4 deck profiles where ventilation is limited or poor. In better ventilated applications 5/4x6 may be considered. Stringer depth and deck thickness can be increased should higher load ratings be required. For additional information on pedestal layout and installation please see our Tropical Forest Products Roof Deck Layout and Installation Guide.

TROPICAL

6200 Tomken Rd Mississauga, ON - L5T 1X7 - Canada
1-855-344-4500 | www.TropicalForestProducts.com | info@tropicalforestproducts.com
© All Rights Reserved - Tropical Forest Products 2023



LEGAL LUMBER™

